


Apt-SM12A Specification Sheet.

Image



Frequency Response

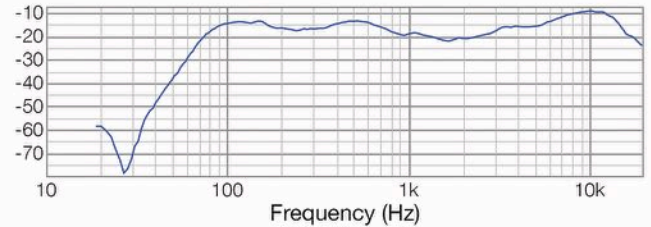


Specification

Rated Power (AES)	550w
Rated impedance:	8Ω
SPL (1w1m)	98dB
SPL max:	125.5dB
Frequency response:	65Hz - 19KHz
Component:	12" (3.38" coil) Neodymium cast woofer
	2.5" Titanium compression HF
Dispersion angle:	80 by 70 degree
IP rating:	IP20
Wedge angle:	30degree
Enclosure:	18mm Birch ply
Finish:	Black, White or *Custom colour
Flying points:	8x M10 flying points
	35mm Tophat with M20 thread
Feet locations:	3 on side and 4 on base
Connector:	2x Neutrik Speakons or **binding post
Weight:	15kg

Dimensions

Dimensions (HWD): 360, 510, 390mm

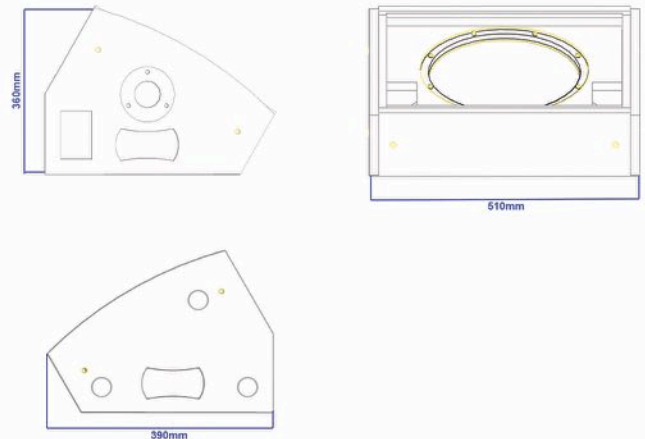

Recommended Settings & Accessory

Crossover settings:	50Hz LR 24dB
Correction EQ:	HS 15000Hz, +2dB, 10Q
	2500Hz, -2.5dB, 3.Q
Amplifier:	1000w RMS
Recommend Sub:	APT-SC18.1
	APT-SC15.1
Recommend Brackets:	Powerdrive Spigot mounts
Poles:	35mm speaker stand or pole
	Penn Elcom M20 threaded pole

SM12A
Audio Monitor

SM12V
Video AutoCue



* Custom paint colours may incur extra cost and increase build time.
 ** Binding post option may increase build time.
 Feet are not supplied on all cabins that have locations on them
 Specification can be changed by APT-GB with out prior notice.
 Apt-GB is trading as part of the GGPM LTD Group.