


# Apt-TC0.6 Specification Sheet.

## Image



## Frequency Response



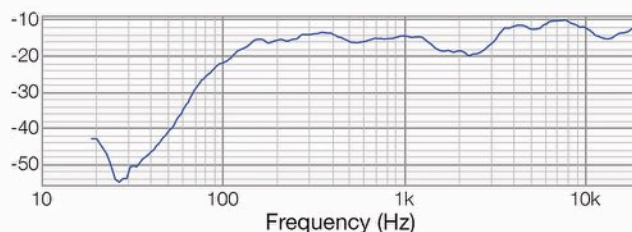


## Specification

Rated Power (AES)	200w
Rated impedance:	8Ω
SPL (1w1m)	94dB
SPL max:	117dB
Frequency response:	75Hz - 20KHz
Component:	6" (2.35" coil) ferrite cast woofer 1.35" Titanium compression HF
Dispersion angle:	80 by 70 degree
IP rating:	IP20
Wedge angle:	15degree
Enclosure:	12mm Birch ply
Finish:	Black, White or *Custom colour
Flying points:	4x M10 flying points Powerdrive 65 point Poll mount M20 thread
Connector:	2x Neutrik Speakons or **binding post
Weight:	6Kg

## Dimensions

Dimensions (HWD): 268, 200, 218mm



## Recommended Settings & Accessory

Crossover settings:	125Hz LR 24dB (with sub) 70Hz LR 48dB (Full range)
Correction EQ:	1.5KHz, -2.5dB, 3.Q
Amplifier:	350w RMS
Recommend Sub:	APT-SC15.1 APT-SC12.1
Recommend Brackets:	Powerdrive 65 Powerdrive M20 wall mount
Poles:	M20 speaker stand Penn Elcom M20 threaded pole

\* Custom paint colours may incur extra cost and increase build time.  
 \*\* Binding post option may increase build time.  
 Feet are not supplied on all cabins that have locations on them  
 Specification can be changed by APT-GB with out prior notice.  
 Apt-GB is trading as part of the GGPM LTD Group.