


# Apt-TCH12 Specification Sheet.

## Image



## Frequency Response

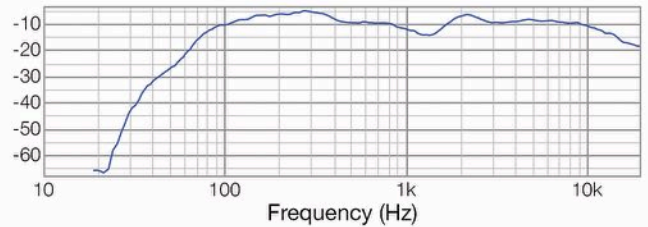


## Specification

Rated Power (AES)	325w
Rated impedance:	8Ω
SPL (1w1m)	99dB
SPL max:	124dB
Frequency response:	65Hz - 19KHz
Component:	12" (2.65" coil) ferrite cast woofer 1.7" Ketone compression HF
Dispersion angle:	80 by 70 degree
IP rating:	IP20
Wedge angle:	30degree
Enclosure:	15mm Birch ply
Finish:	Black, White or *Custom colour
Flying points:	12x M10 flying points Powerdrive 75 point 35mm Tophat with M20 thread
Feet locations:	3 on base and 4 on side
Connector:	2x Neutrik Speakons or **binding post
Weight:	18kg

## Dimensions

Dimensions (HWD): 505, 310, 385mm

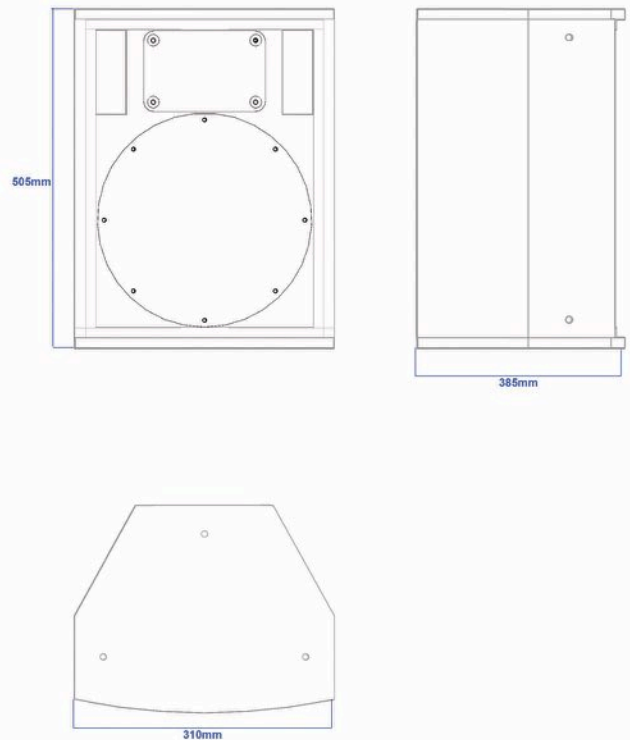

## Recommended Settings & Accessory

Crossover settings:	100Hz LR 24dB (with sub) 45Hz LR 48dB (Full range)
Correction EQ:	2500Hz, -2.5dB, 3.Q
Amplifier:	600w RMS
Recommend Sub:	APT-SC18.1 APT-SC15.1
Recommend Brackets:	Powerdrive 75 Powerdrive Spigot mounts
Poles:	35mm speaker stand or pole Penn Elcom M20 threaded pole

\* Custom paint colours may incur extra cost and increase build time.  
 \*\* Binding post option may increase build time.  
 Feet are not supplied on all cabins that have locations on them  
 Specification can be changed by APT-GB with out prior notice.  
 Apt-GB is trading as part of the GGPM LTD Group.