Apt-CLF564 Specification Sheet.

Image

Dimensions

| Dimensions (HWD):	1000, 165, 155mm

1000mm
155mm
165mm
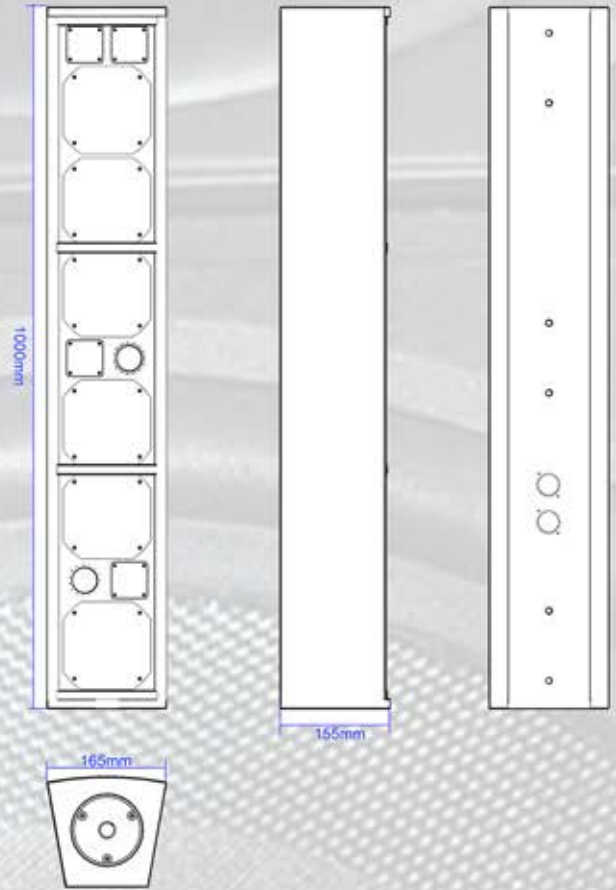
Specification:

Rated Power (AES)	450w
Rated impedance:	8Ω
SPL (1w1m)	102dB
SPL max:	128dB
Frequency response:	60Hz - 20KHz
Component:	6 x 5" Driver & 4 x 0.5" HF
IP rating:	IP20
Enclosure:	12mm Birch ply
Finish:	Black, White or *Custom colour
Flying points:	M20 Top Hat, Powerdrive 75 Point
	7 x M10 Fixing Points
Connector:	2 x Neutrik Speakon
Weight:	13Kg

Recommended Settings & Accessory

Crossover settings:	60Hz LR 24dB
With SC12.1, SC208	125Hz 24dB LR
With SC12.2, SC10.2	100Hz 24dB LR
Correction EQ:	+3dB 91Hz 2Q, -3dB 6KHz 6Q
Amplifier:	400w RMS
Recommended Sub:	APT-SC12.1, SC12.2, SC10.2, SC208

Frequency Response

Frequency Response

Frequency (Hz)
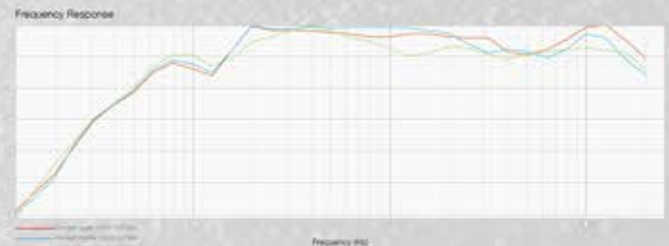
* Custom paint colours may incur extra cost and increase build time.
** Binding Post, 4 Pole euro block connector available may increase build time.
Feet are not supplied on all cabins that have locations on them
Specification can be changed by APT-GB with out prior notice.
Apt-GB is trading as part of the GGPM LTD Group.

Tel: +44 (0) 1579 212210
Email: info@apt-gb.com
Website: www.apt-gb.com