



Apt-CMA82 Specification Sheet.

Image






Specification:

Rated Power (AES)	525w
Rated impedance:	4Ω
SPL (1w1m)	99dB
SPL max:	127dB
Frequency response:	80Hz - 20KHz
Component:	2 x 8" MF ferrite cast woofer& 1 x 1" Compression HF
IP rating:	IP20
Enclosure:	15mm Birch ply
Finish:	Black, White or *Custom colour
Flying points:	35mm Dual Tilt Top hat 0° & 5°,
	5 x M10 Flying points
	Powerdrive 65
Connector:	2x Neutrik Speakons
Weight:	16.5kg


Recommended Settings & Accessory

Crossover settings:	60Hz LR 24dB Full Range
	125Hz B'Worth 12dB with SC122
Correction EQ:	80Hz, +3.5dB, 1Q
	2.1kHz, -2dB, 2Q
	5kHz, -2dB, 5Q
	18kHz, +1dB, 1Q
Amplifier:	750w RMS
Recommend Sub:	SC122 Active
Poles:	35mm speaker stand

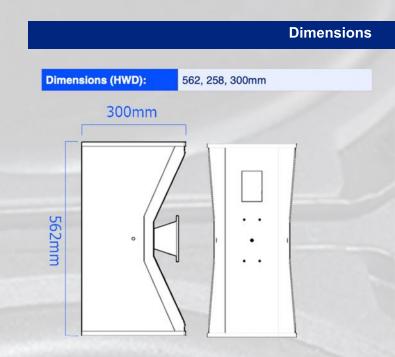

258mm

Frequency Response

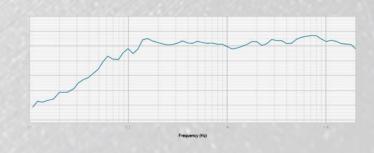

* Custom paint colours may incur extra cost and increase build time. ** Binding Post, 4 Pole euro block connector available may increase build time. Feet are not supplied on all cabins that have locations on them Specification can be changed by APT-GB with out prior notice. Apt-GB is trading as part of the GGPM LTD Group.

Tel: +44 (0) 1579 212210 Email: info@apt-gb.com Website: www.apt-gb.com