


# Apt-IC12 Specification Sheet.

## Image



## Frequency Response

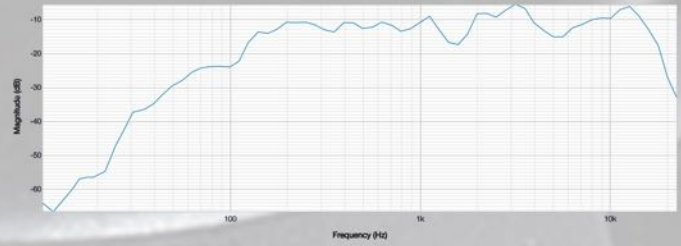


## Specification:

<b>Rated Power (AES)</b>	550w
<b>Rated impedance:</b>	8Ω
<b>SPL (1w1m)</b>	98dB
<b>SPL max:</b>	122dB
<b>Frequency response:</b>	55Hz - 19KHz
<b>Component:</b>	12" Kevlar Paper 3.25" VC& 2.5" Compression (Neo)
<b>IP rating:</b>	IP20
<b>Enclosure:</b>	12mm Birch ply
<b>Finish:</b>	Black, White or *Custom colour
<b>Flying points:</b>	10x M10, 4 x M6 Back and Side (power drive 90) & 35mm Tophat with M20 Threaded Polemount
<b>Connector:</b>	2 x Neutrik Speakon
<b>Weight:</b>	15Kg

## Dimensions

**Dimensions (HWD):** 406,280,287mm

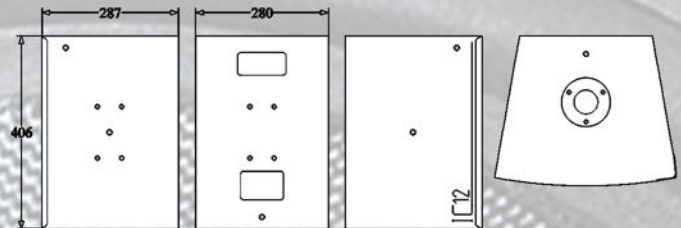

## Recommended Settings & Accessory

<b>Crossover settings:</b>	60Hz 24dB LR
<b>With Sub:</b>	120Hz 24dB LR
<b>Amplifier:</b>	1200w RMS

\* Custom paint colours may incur extra cost and increase build time.  
 \*\* Binding Post, 4 Pole euro block connector available may increase build time.  
 Feet are not supplied on all cabins that have locations on them  
 Specification can be changed by APT-GB with out prior notice.  
 Apt-GB is trading as part of the GGPM LTD Group.