

Apt-SC208 Passive Specification Sheet.

Image



Frequency Response




Specification:

| | |
|---------------------|---------------------------------------|
| Rated Power (AES): | 500w |
| Rated impedance: | 4Ω |
| SPL (1w1m): | 99dB |
| SPL max: | 126dB |
| Frequency response: | 55Hz - 400Hz |
| Component: | 2 x 8" ferrite cast woofer |
| IP rating: | IP20 |
| Enclosure: | 15mm Birch ply |
| Finish: | Black, White or *Custom colour |
| Connector: | 2x Neutrik Speakons or **binding post |
| Weight: | 15Kg |

Dimensions

Dimensions (HWD): 240, 520, 540mm

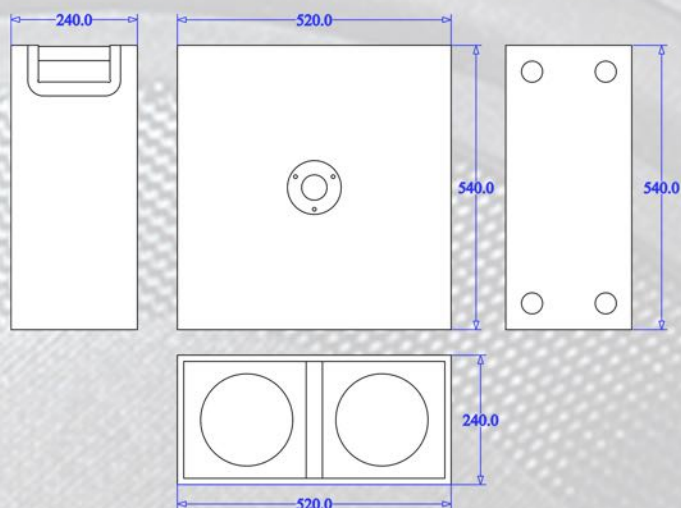

Recommended Settings & Accessory

| | |
|-----------------------|-----------------------------|
| Crossover settings: | 50Hz LR 24dB |
| | 125Hz LR 24dB |
| | 150Hz LR 12dB With Top Pack |
| Correction EQ: | 63Hz, 3dB, 15Q |
| Amplifier: | 700w RMS |
| Recommended Top Pack: | CLF511, CL84, CL532 |

* Custom paint colours may incur extra cost and increase build time.
 ** Binding Post, 4 Pole euro block connector available may increase build time.
 Feet are not supplied on all cabins that have locations on them
 Specification can be changed by APT-GB with out prior notice.
 Apt-GB is trading as part of the GGPM LTD Group.