

Apt-SC208 Active Specification Sheet.

Image



Frequency Response




Specification:

Rated Power (AES):	500w
Rated impedance:	4Ω
SPL (1w1m):	99dB
SPL max:	126dB
Frequency response:	55Hz - 400Hz
Component:	2 x 8" ferrite cast woofer
IP rating:	IP20
Enclosure:	15mm Birch ply
Finish:	Black, White or *Custom colour
Flying points:	M20 Thread Pole mount
Connector:	2 x XLR Signal in & Out
	1 x Speakon (for top pack only)
	1 x USB B for DSP
	1 x PowerCon True1 in & Out
Weight:	15Kg

Dimensions

Dimensions (HWD): 240, 520, 540mm

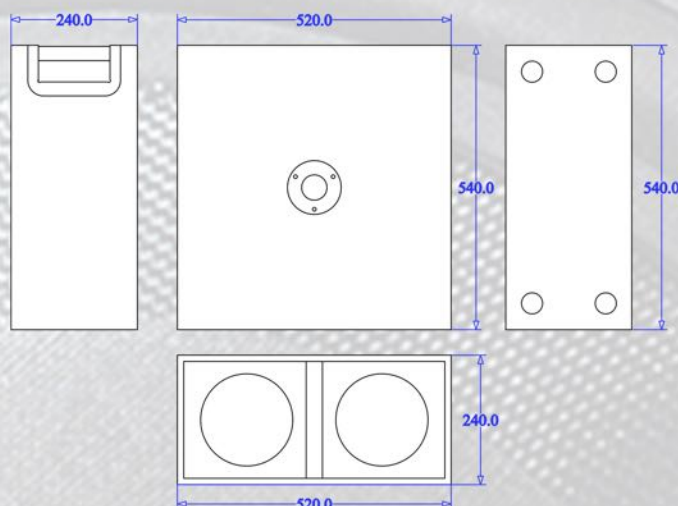

Recommended Settings & Accessory

Crossover settings:	50Hz LR 24dB
	125Hz LR 24dB
	150Hz LR 12dB With Top Pack
Correction EQ:	63Hz, 3dB, 15Q
Amplifier:	Built In Amplifier with output for CMA441 & DSP
Recommended Top Pack:	CMA441, CLF511, CL84, CL532

* Custom paint colours may incur extra cost and increase build time.
 ** Binding Post, 4 Pole euro block connector available may increase build time.
 Feet are not supplied on all cabins that have locations on them
 Specification can be changed by APT-GB with out prior notice.
 Apt-GB is trading as part of the GGPM LTD Group.