


Apt-SF852 Specification Sheet.

Image



Dimensions


Dimensions Wedge (HWD):	415, 550, 600mm
Dimensions Sub (HWD):	745, 565, 603

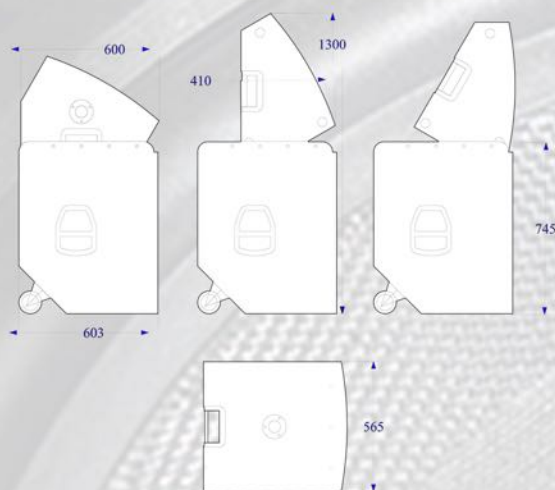

Specification:

	Top	Sub
Rated Power (AES)	600w	1600w
Rated impedance:	8Ω	8Ω
SPL (1w1m)	97dB	96dB
SPL max:	126dB	130dB
Frequency response:	65Hz - 19KHz	32Hz - 175KHz
Component:	15" (3.38" coil) Neodymium cast woofer	18" (4" coil) ferrite cast woofer
	2.5" Titanium compression HF	IP20
Dispersion angle:	80 by 70 degree	N/a
IP rating:	IP20	IP20
Wedge angle:	30degree	N/a
Enclosure:	15mm Birch ply	18mm Birch ply
Finish:	Black, White or *Custom colour	35mm Tophat
Mounting:	35mm Tophat with M20 thread	Black, White or *Custom colour
Feet locations:	3 on side and 4 on base	4 on Base
Connector:	2x Neutrik Speakons or **binding post	NL4 SpeakON out to top pack, 3 pin XLR signal in and Loop out, USB-B DSP control
Weight:	24kg	35Kg

Frequency Response

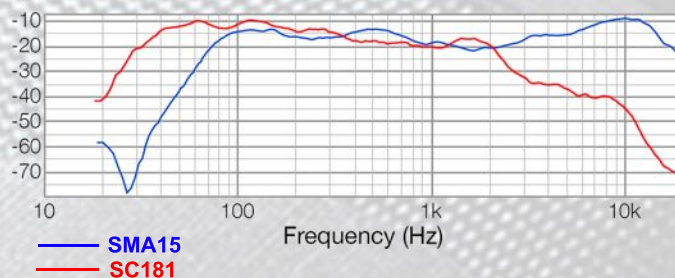

Recommended Settings & Accessory

Crossover settings:	32Hz LR 24dB
Correction EQ:	HS 15000Hz, +2dB, 10Q
	2500Hz, -2.5dB, 3.Q
Poles:	35mm speaker stand or pole
	Penn Elcom M20 threaded pole

* Custom paint colours may incur extra cost and increase build time.
 ** Binding Post, 4 Pole euro block connector available may increase build time.
 Feet are not supplied on all cabins that have locations on them
 Specification can be changed by APT-GB with out prior notice.
 Apt-GB is trading as part of the GGPM LTD Group.