


Apt-TB1281 (Horn loaded medium throw) Specification Sheet.

Image



Frequency Response


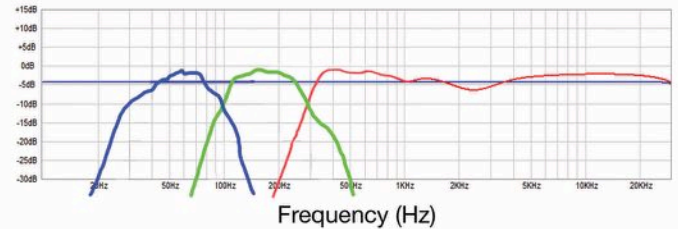


Specification

Rated power:	1000w (700w & 300w)
Rated impedance:	8Ω low mid & 8Ω High mid - HF
SPL (1w 1m):	101dB low mid 104dB high mid & HF
Components:	1x 12" low mid, 8" high mid & 1.4"
IP rating:	IP20
Wedge angle:	10°
Finish:	Black, White or custom colour
Dispersion angle:	V 40° H 60°
Enclosure:	15mm Birch plywood
Flying Points:	16x m10 points
Connector:	2x Neutrik Speakons
Weight:	30Kg

Dimensions

Dimensions (HDW): 900, 480, 430mm

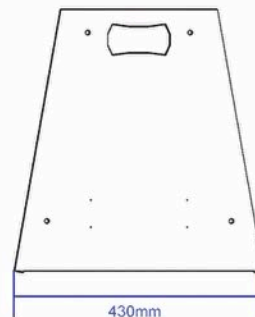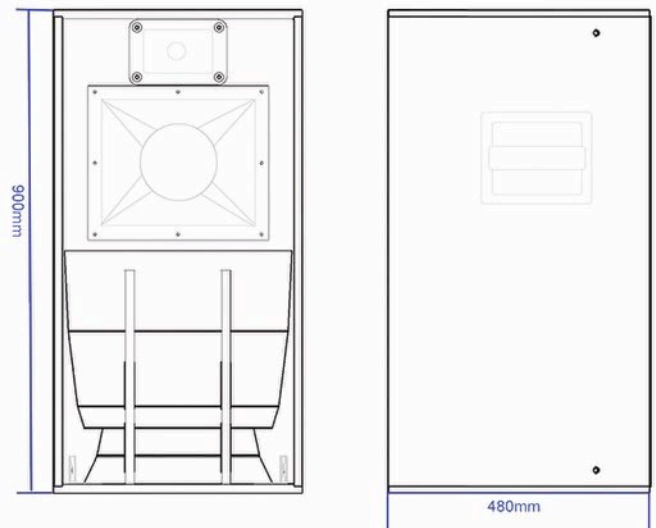

Recommended Settings & Accessory

Crossover SC181:	35Hz But 24dB - 100Hz But 12dB
Crossover low mid ±1:	100hz But 18dB - 400Hz But 18dB
Crossover high HF ±2:	400Hz 12dB - Out
Time Correction:	Sub: 0.583ms Low mid: 0.0ms High mid & HF: 0.437ms
EQ settings:	18.1khz high shelf +2dB, 3khz -3 5Q 61hz +2 10Q, 41hz +3 5Q
Optional extras:	Wheel board, grill and tilt board

* Custom paint colours may incur extra cost and increase build time.
** Binding post option may increase build time.
Feet are not supplied on all cabinets that have locations on them
Specification can be changed by APT-GB with out prior notice.
Apt-GB is trading as part of the GGPM LTD Group.