


Apt-SM24.av Specification Sheet.

Image



Frequency Response

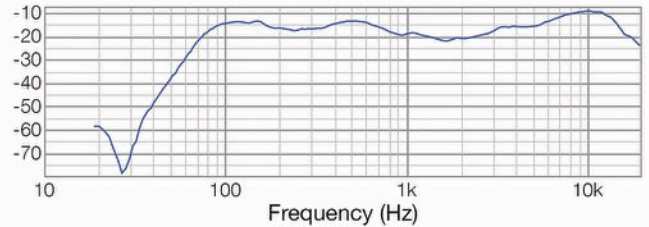


Specification

Rated Power (AES)	600w
Rated impedance:	4Ω
SPL (1w1m)	97dB
SPL max:	125dB
Frequency response:	58Hz - 91.5KHz
Component:	2x 10" (2.65" coil) drivers 1x 1.7" HF compression driver
Screen:	23.6" (1920x 1080P) 16:9
Brightness:	250cd/m2
Contrast ratio:	1000:1
Response time:	5 (G to G)
Power consumption:	100- 240v 50/60hz (35w) (screen)
Connections:	2x PowerCon (screen power), 1x HDMI, 1x VGA, 1x USB, Component on 3x RCA 2x SpeakOn (audio)
Construction:	18mm birch ply wood
Pole Mount:	35mm top hat with M20 thread.
Wedge angle:	30 degree
Protective front:	4mm Polycarbonate
Weight:	22Kg
Colour:	Black (custom colour available)

Dimensions

Dimensions (HWD): 405, 620, 585mm

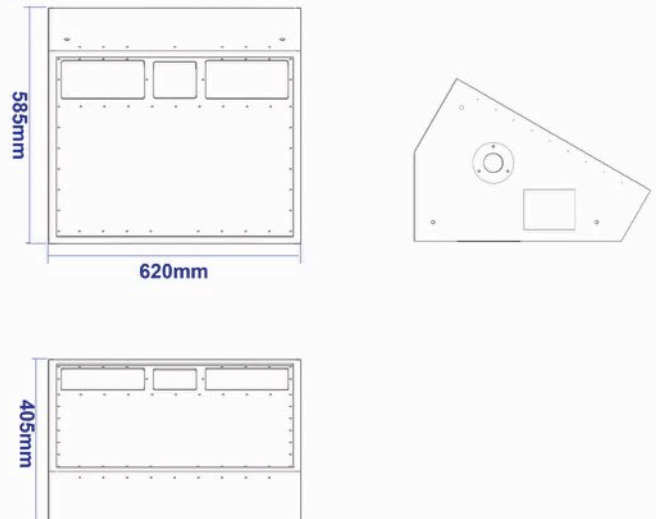

Other products in stage wedge range



Recommended Settings & Accessory

Crossover settings:	45hz 24dB LR in full range mode
Correction EQ:	Bell 1.25Khz -2dB 5.Q bell 3.5KHz, -2dB, 10.Q
Amplifier:	1000w RMS
Recommend Sub:	APT-SC18.1
Recommend Flying:	M10 eye bolts for flying
Poles:	35mm or M20 thread

* Custom paint colours may incur extra cost and increase build time.
 ** Binding post option may increase build time.
 Feet are not supplied on all cabins that have locations on them
 Specification can be changed by APT-GB with out prior notice.
 Apt-GB is trading as part of the GGPM LTD Group.